
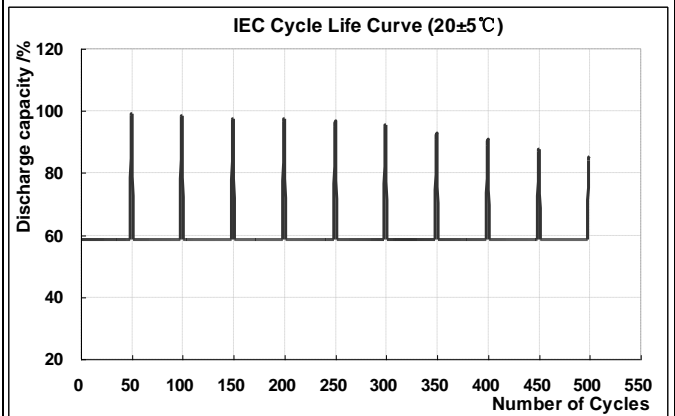
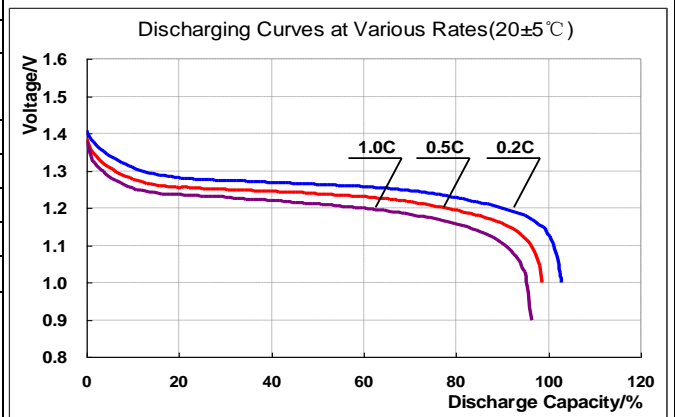


Nominal voltage (V)		1.2
Capacity* (mAh)	Nominal	2000
	Minimum	1900
Charging**	Standard	190mA×16hours
	Quick	380mA×7hours
	Rapid	950mA×2.4hours -ΔV=5mV
Temperature recommended (°C)	Standard charge	0~40
	Quick charge	10~40
	Rapid charge	10~30
	Discharge	-10~50
	Storage	-20~30
Internal resistance		≤38mΩ
End voltage of discharge		1.0V
Charge (capacity) retention (20°C 6 months)		80%
Weight		Approx. 27g
Dimensions With tube (mm)	D	Diameter 14.5 ^{+0.7}
	H	Height 50.5 ^{+0.15}
	a	Top diameter 4.6-5.5
	b	Top height 1.0 (Minimum)
Drawing		

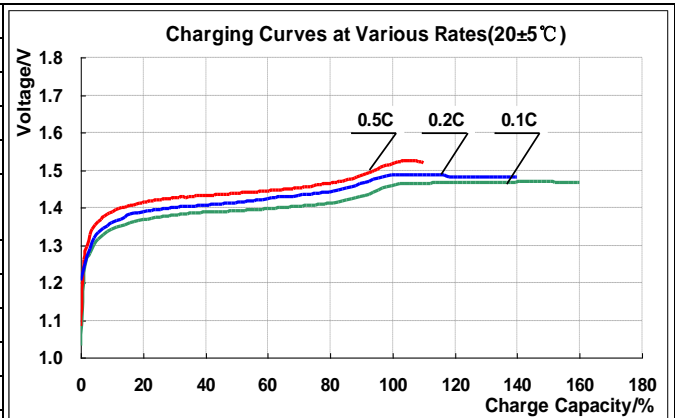

Note:
 *: Discharge capacity when the battery unit is discharged at 380mA to the 1.0V end voltage after being charged at 190mA for 16 hours
 **: Please discharge to the 1.0V end voltage with 380mA before charging the battery unit.

The data sheet is for reference only and should not be used as a basis for product described guarantee or warranty.